

1200V 75A Insulated Gate Bipolar Transistor

AKBK2A075YHH

Description:

Gen 2 IGBT with soft, fast recovery full current rated anti-parallel Emitter Controlled diode, providing ultra-low conduction loss . They are designed for applications such as UPS, inverters, etc.

Features:


- 10µsec short circuit withstand time at $T_{VJ}=175^{\circ}\text{C}$
- Easy paralleling capability due to positive temperature coefficient in V_{CEsat}
- Low EMI
- Low Gate Charge Q_G
- Very soft, fast recovery full current anti-parallel diode
- Maximum junction temperature $T_{VJMAX}=175^{\circ}\text{C}$
- RoHS compliant ^(Note 1)
- Halogen-free ^(Note 1)

Applications:


- Industrial UPS
- Charger
- Energy Storage
- Three-phase Solar String Inverter

Key Performance Parameters:

Parameter	Value	Unit
V_{CE}	1200	V
$V_{CESAT}, T_{VJ} = 25^{\circ}\text{C}$	1.9	V
I_C	75	A



TO247Plus



Ordering Information:

Ordering Code	Package Type	Marking Code	Form	Packing
AKBK2A075YHH	TO247Plus-3L	BK2A075YHH	Tube	300PCS

Notes:

1. Contact ALKAIDSEMI sales for detail information

Maximum Ratings ($T_{VJ} = 25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
V_{CE}	Collector- Emitter Voltage	1200	V
I_C	Collector Current - Continuous ($T_C = 25^{\circ}\text{C}$) ^(Note 1)	150	A
	Collector Current - Continuous ($T_C = 100^{\circ}\text{C}$)	75	A
I_{CM}	Collector Current - Pulsed ^(Note 2)	300	A
I_F	Diode Forward Current, Limited by T_{VJmax} ($T_C = 25^{\circ}\text{C}$)	150	A
	Diode Forward Current, Limited by T_{VJmax} ($T_C = 100^{\circ}\text{C}$)	75	A
I_{FM}	Diode Pulsed Current, - Pulsed ^(Note 2)	300	A
V_{GE}	Gate-Emitter Voltage	± 20	V
	Transient Gate-Emitter Voltage ($t_p \leq 10\mu\text{s}$, $D < 0.010$)	± 30	
T_{SC}	Short Circuit Withstand Time $V_{GE} = 15.0\text{V}$, $V_{CC} \leq 400\text{V}$	10	μs
P_D	Power Dissipation ($T_C = 25^{\circ}\text{C}$)	937	W
	Power Dissipation ($T_C = 100^{\circ}\text{C}$)	468	W
T_{VJ}	Operating Junction Temperature Range	-40 to +175	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150	$^{\circ}\text{C}$

Thermal Characteristics

Symbol	Parameter	Value	Units
$R_{\theta JC}$	IGBT Thermal Resistance, Junction-to-Case, Steady-State	0.16	$^{\circ}\text{C}/\text{W}$
$R_{\theta JC}$	Diode Thermal Resistance, Junction-to-Case, Steady-State	0.28	$^{\circ}\text{C}/\text{W}$
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient Steady State	40	$^{\circ}\text{C}/\text{W}$

Notes:

1. The max collector current rating is package limited
2. Repetitive Rating: Pulse width limited by maximum junction temperature

Electrical Characteristics ($T_{VJ} = 25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units	
Static Characteristics							
$V_{(BR)CES}$	Collector-Emitter Breakdown Voltage	$V_{GE} = 0\text{ V}, I_C = 1\text{ mA}$	1200			V	
V_{CESAT}	Collector-Emitter Saturation Voltage	$V_{GE} = 15\text{ V}, I_C = 75\text{ A}$	1.7	1.9	2.3	V	
		$V_{GE} = 15\text{ V}, I_C = 75\text{ A}, T_{VJ} = 175^{\circ}\text{C}$		2.8			
V_F	Diode Forward Voltage	$V_{GE} = 0\text{ V}, I_F = 75\text{ A}$	1.7	1.8	2.3	V	
		$V_{GE} = 0\text{ V}, I_F = 75\text{ A}, T_{VJ} = 175^{\circ}\text{C}$		1.85			
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$V_{CE} = V_{GE}, I_C = 2.6\text{ mA}$	5.1	5.8	6.5	V	
I_{CES}	Zero Gate Voltage Collector Current	$V_{CE} = 1200\text{ V}, V_{GE} = 0\text{ V}$			450	μA	
		$V_{CE} = 1200\text{ V}, V_{GE} = 0\text{ V}, T_{VJ} = 175^{\circ}\text{C}$		5000			
I_{GES}	Gate-Emitter Leakage Current	$V_{GE} = \pm 20\text{ V}, V_{CE} = 0\text{ V}$			± 100	nA	
g_{fs}	Transconductance	$V_{GE} = 20\text{ V}, I_C = 75\text{ A}$		49		S	
Dynamic Characteristics							
C_{ies}	Input Capacitance	$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V},$ $F = 1\text{ MHz}$		9812		pF	
C_{oes}	Output Capacitance				312		pF
C_{res}	Reverse Transfer Capacitance				61		pF
Q_G	Total Gate Charge	$V_{CC} = 960\text{ V}, I_C = 75\text{ A},$ $V_{GE} = 15\text{ V}$		321		nC	
Q_{GE}	Gate-Emitter Charge				71		nC
Q_{GC}	Gate-Collector Charge				121		nC
L_E	Internal Emitter Inductance			8		nH	
Switching Characteristics, Inductive Load ($T_{VJ} = 25^{\circ}\text{C}$)							
$t_{d(on)}$	Turn On Delay Time	$V_{CC} = 600\text{ V}$ $I_C = 75\text{ A}$ $V_{GE} = 15\text{ V}$ $R_{G(on)} = 6\ \Omega$ $R_{G(off)} = 6\ \Omega$		46		ns	
t_r	Rise Time				60		ns
$t_{d(off)}$	Turn Off Delay Time				185		ns
t_f	Fall Time				89		ns
E_{on}	Turn On Energy				5.69		mJ
E_{off}	Turn Off Energy				2.75		mJ
E_{total}	Total Switching Energy				8.44		mJ

Diode Characteristics						
t_{rr}	Reverse Recovery Time	$V_{CC} = 600\text{ V}, I_F = 75\text{ A},$ $di/dt = 600\text{ A}/\mu\text{s}$		394		ns
Q_{RR}	Reverse Recovery Charge			2.9		μC
I_{rrm}	Peak Reverse Recovery Current			14		A
d_{irr}/dt	Diode Peak Rate of Fall of Reverse Recovery Current			-32		$\text{A}/\mu\text{s}$







Switching Characteristics, Inductive Load ($T_{VJ} = 175^\circ\text{C}$)







$t_{d(on)}$	Turn On Delay Time	$V_{CC} = 600\text{ V}$ $I_C = 75\text{ A}$ $V_{GE} = 15\text{ V}$ $R_{G(on)} = 6\ \Omega$ $R_{G(off)} = 6\ \Omega$		45		ns
t_r	Rise Time			70		ns
$t_{d(off)}$	Turn Off Delay Time			208		ns
t_f	Fall Time			149		ns
E_{on}	Turn On Energy			9.87		mJ
E_{off}	Turn Off Energy			4.04		mJ
E_{total}	Total Switching Energy			13.92		mJ







Diode Characteristics







t_{rr}	Reverse Recovery Time	$V_R = 600\text{ V}, I_F = 75\text{ A},$ $di/dt = 600\text{ A}/\mu\text{s}$		541		ns
Q_{RR}	Reverse Recovery Charge			10		μC
I_{rrm}	Peak Reverse Recovery Current			28.9		A
d_{irr}/dt	Diode Peak Rate of Fall of Reverse Recovery Current			-95		$\text{A}/\mu\text{s}$


Electrical Characteristics Diagrams

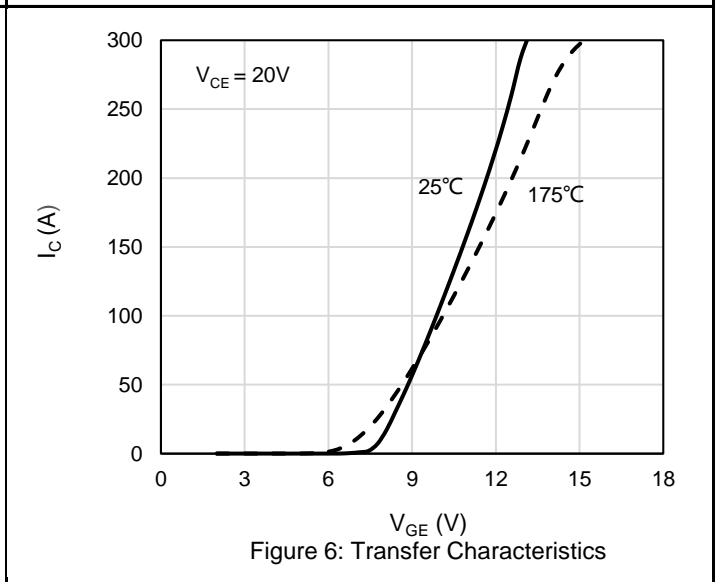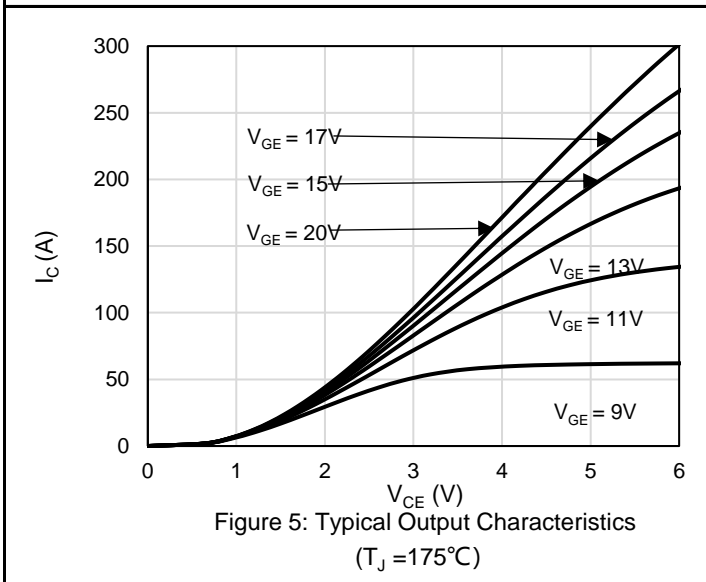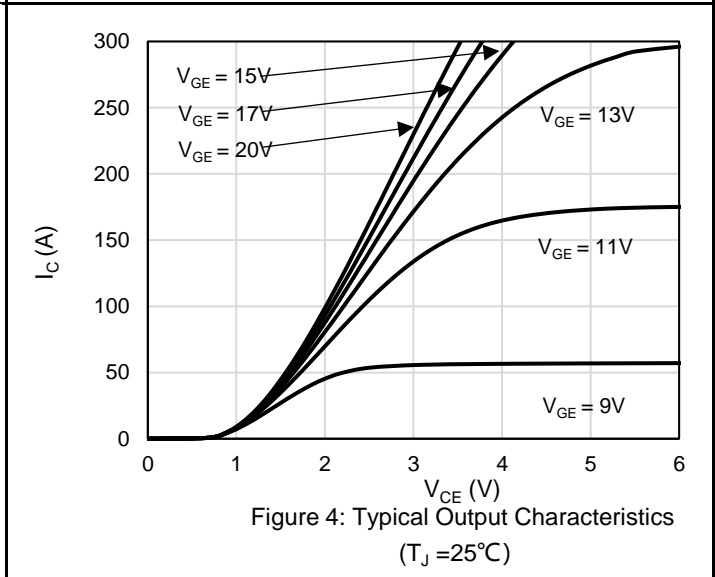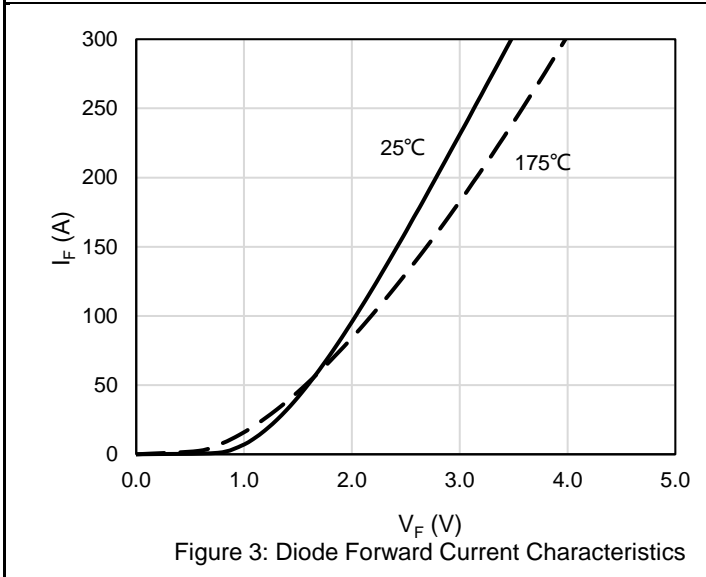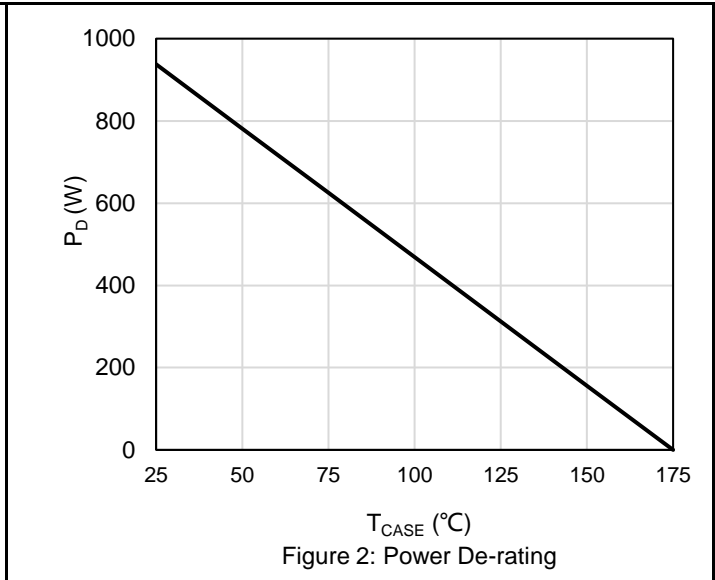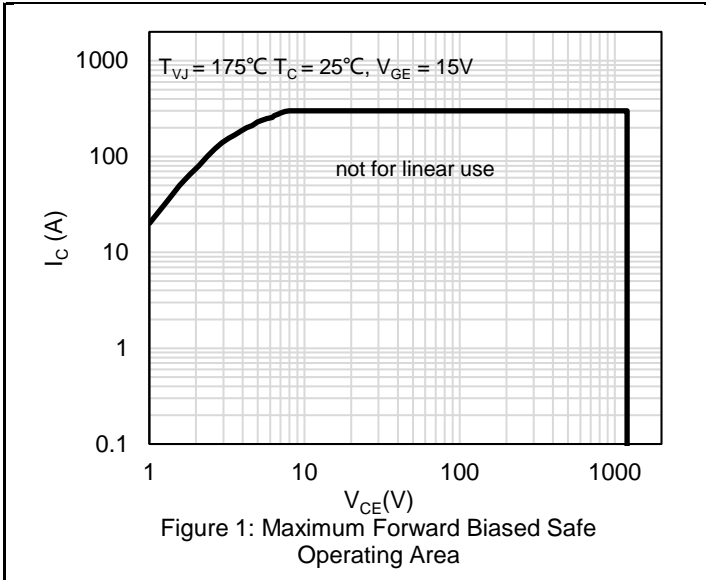

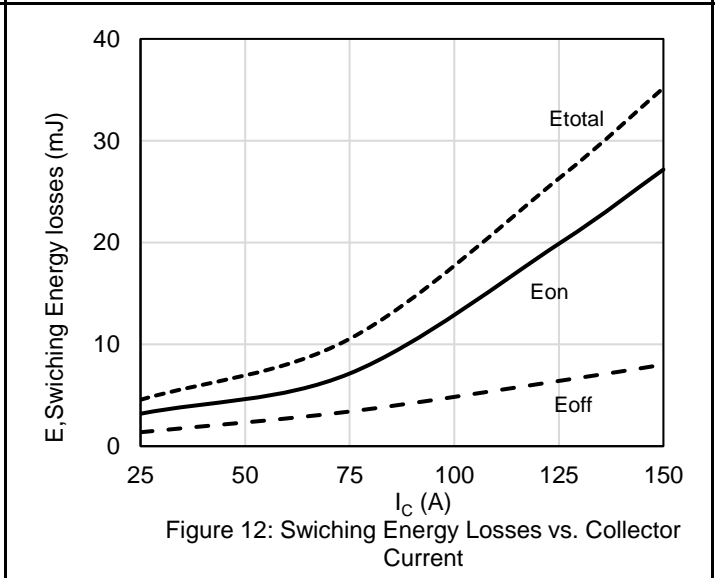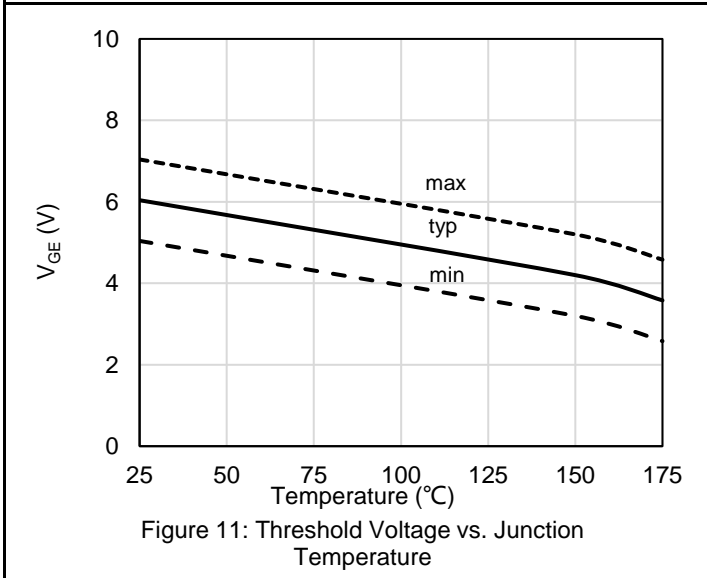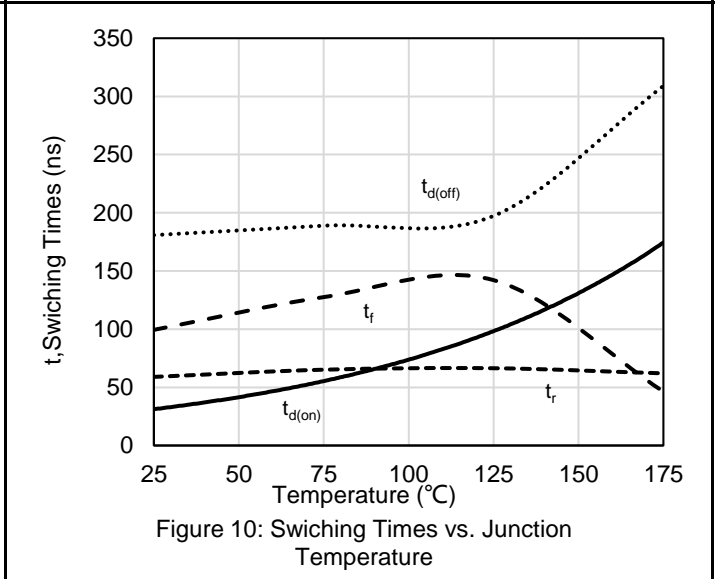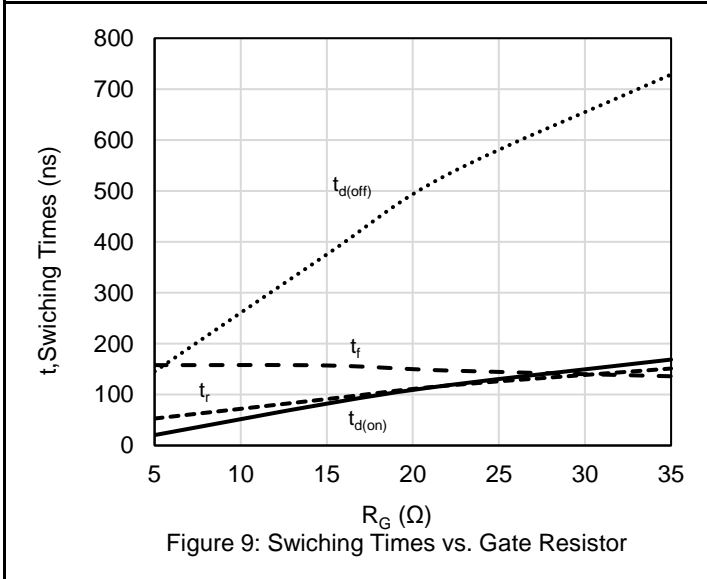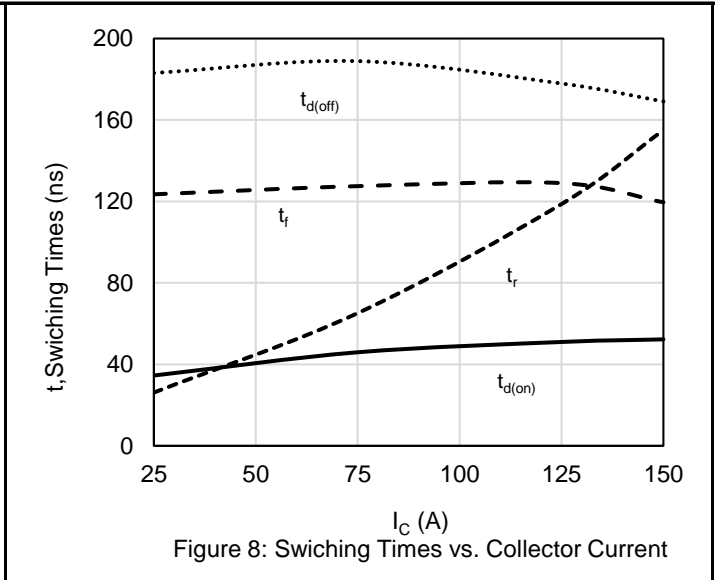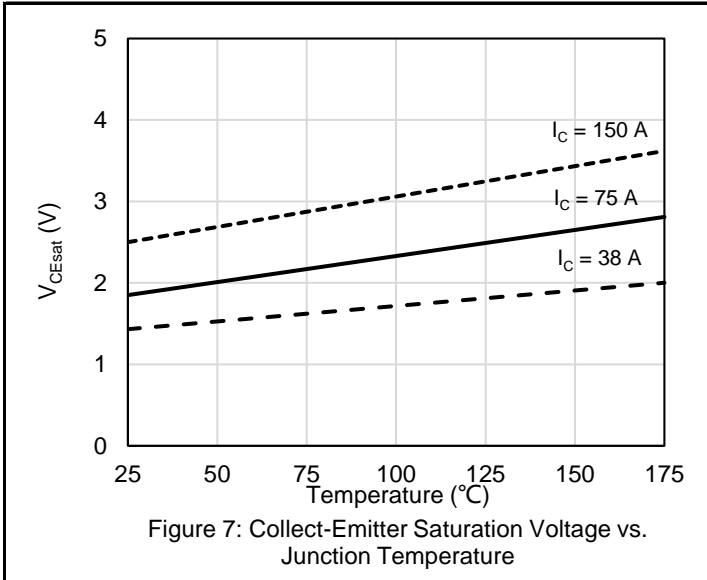

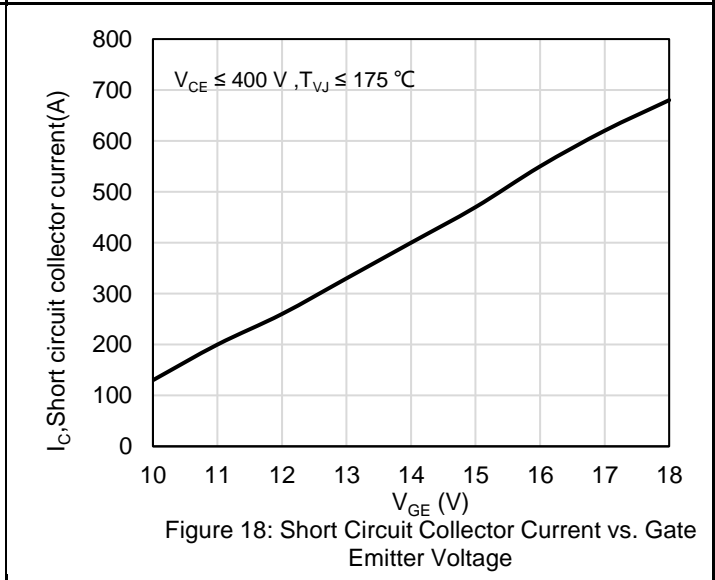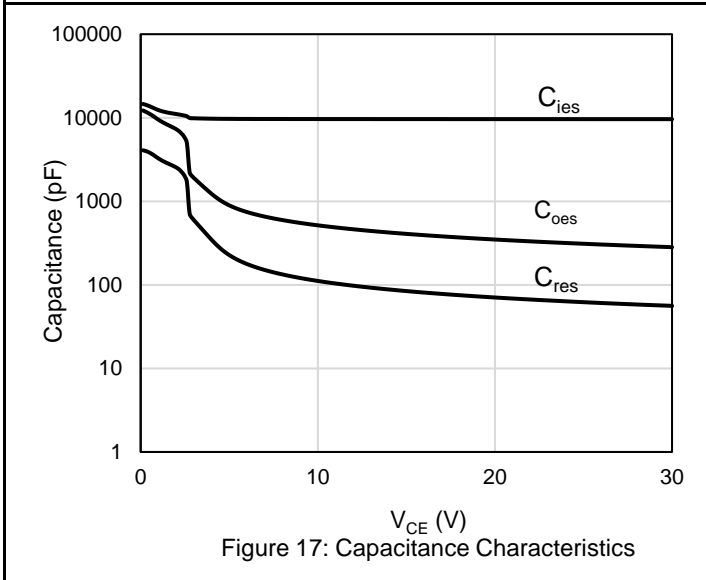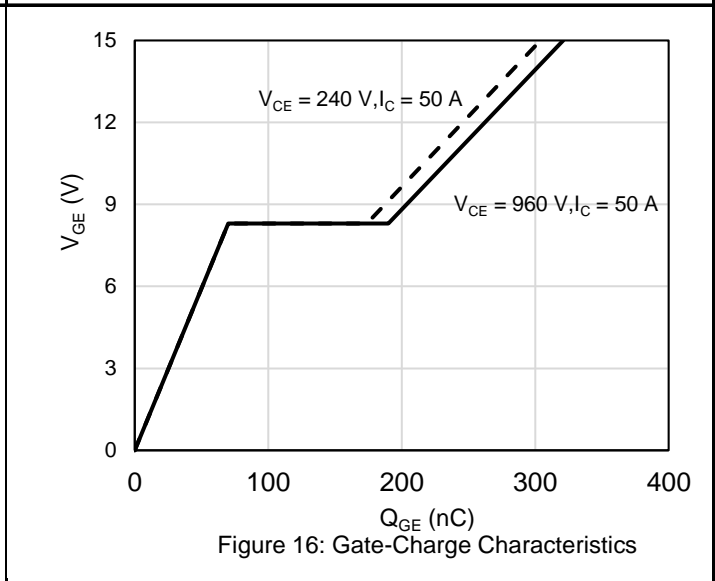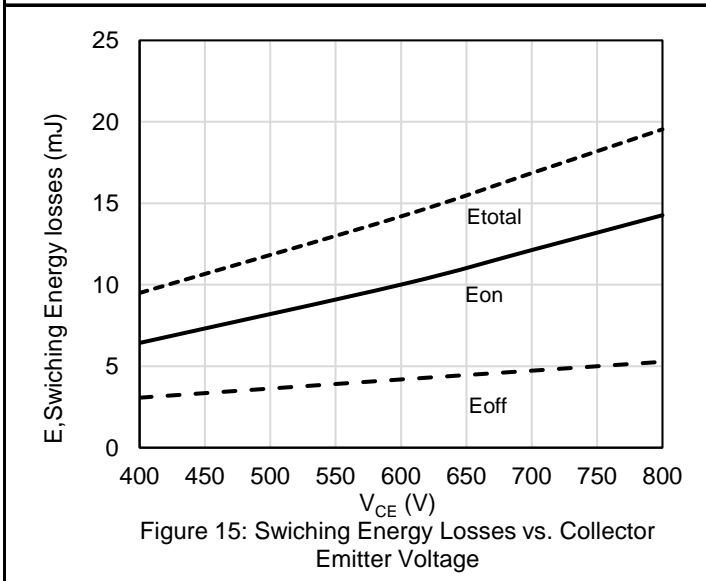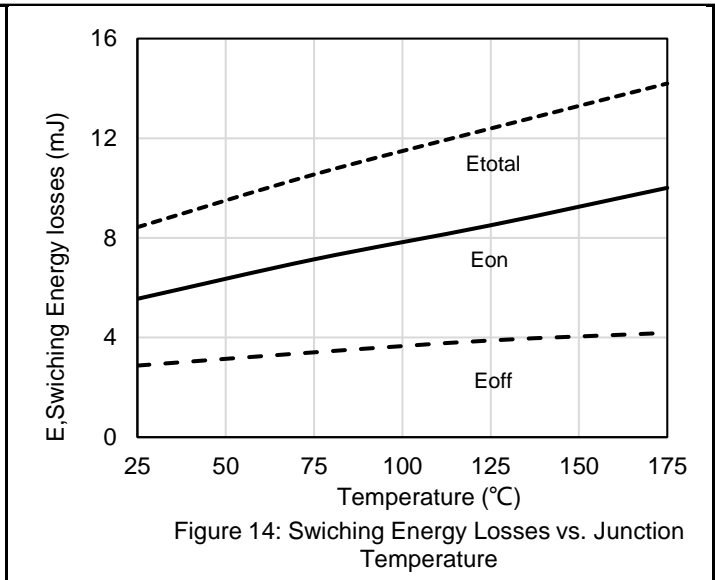
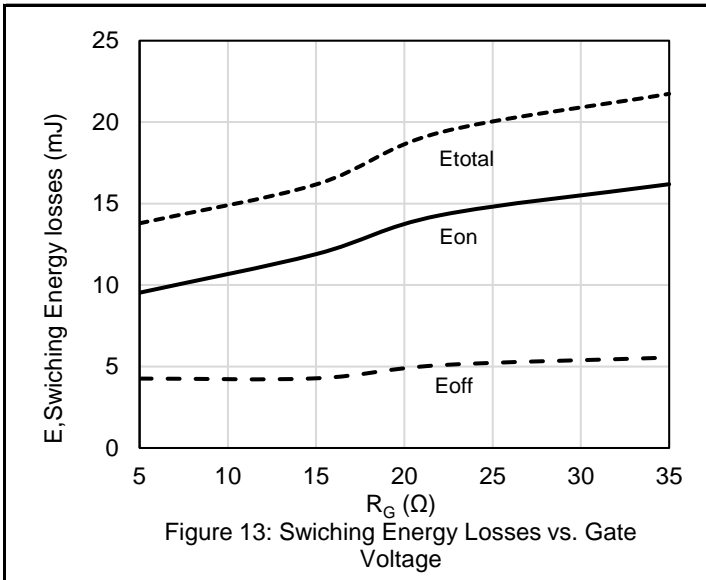


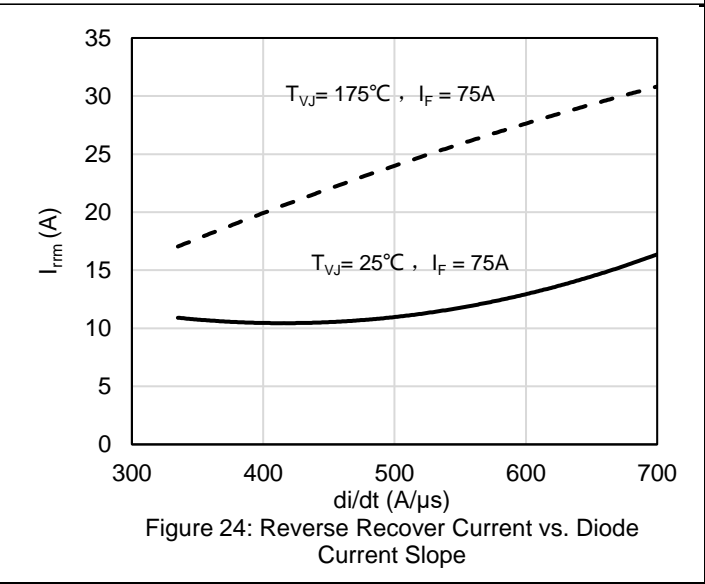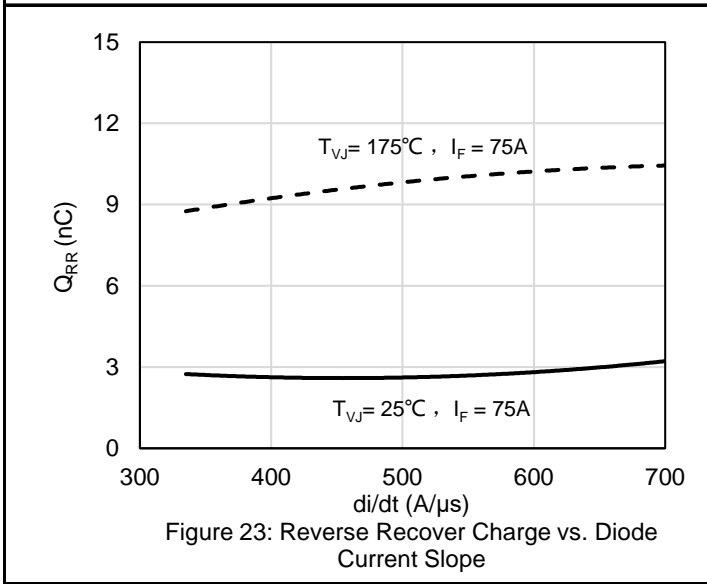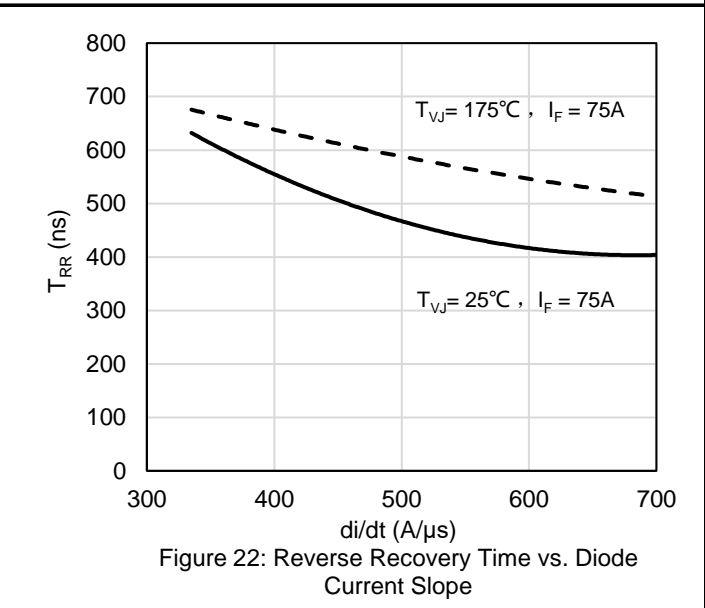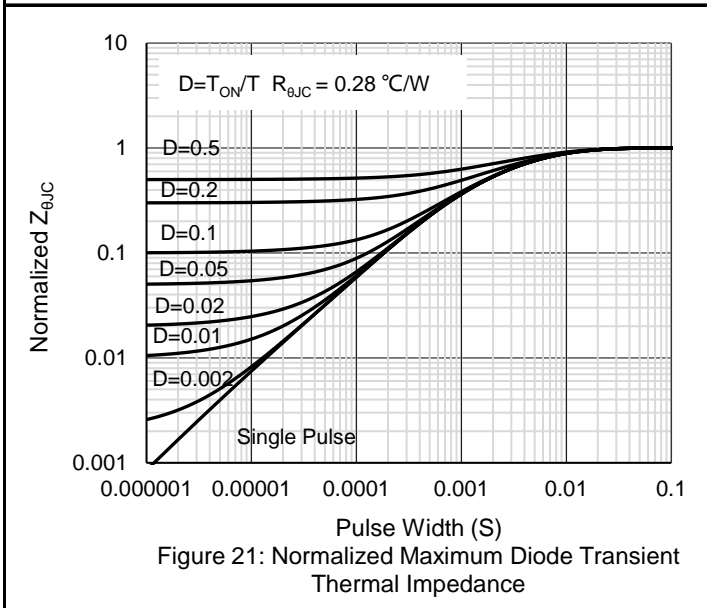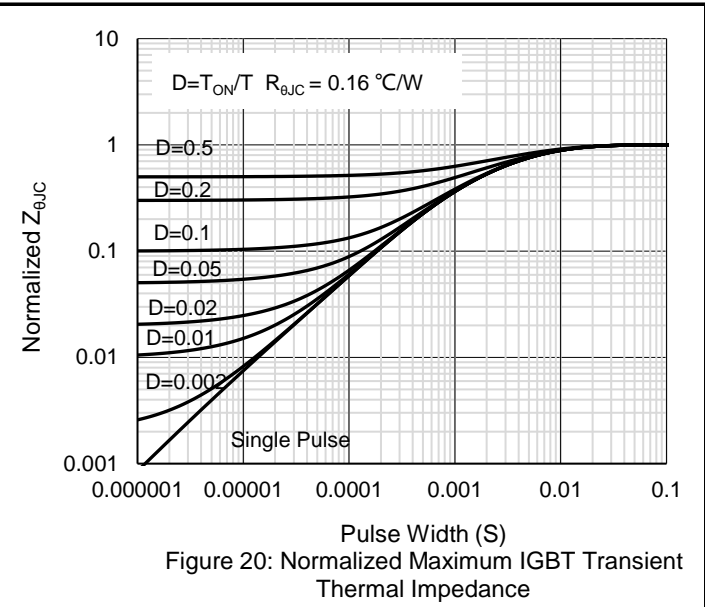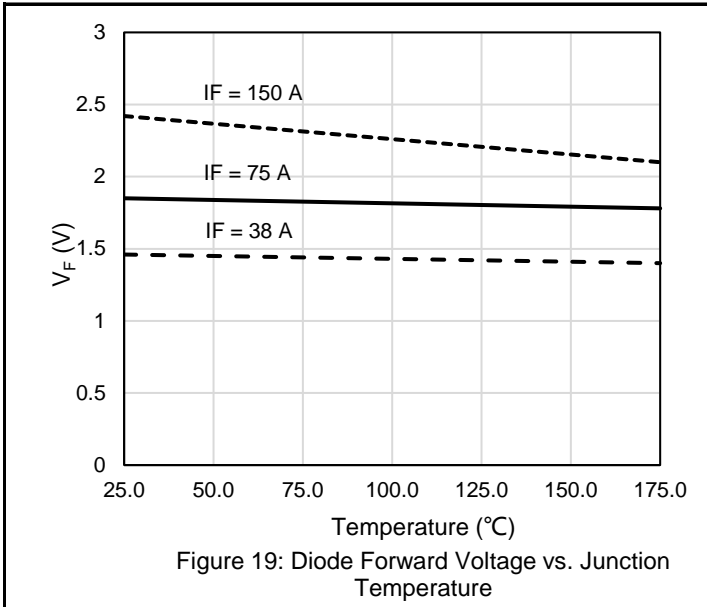


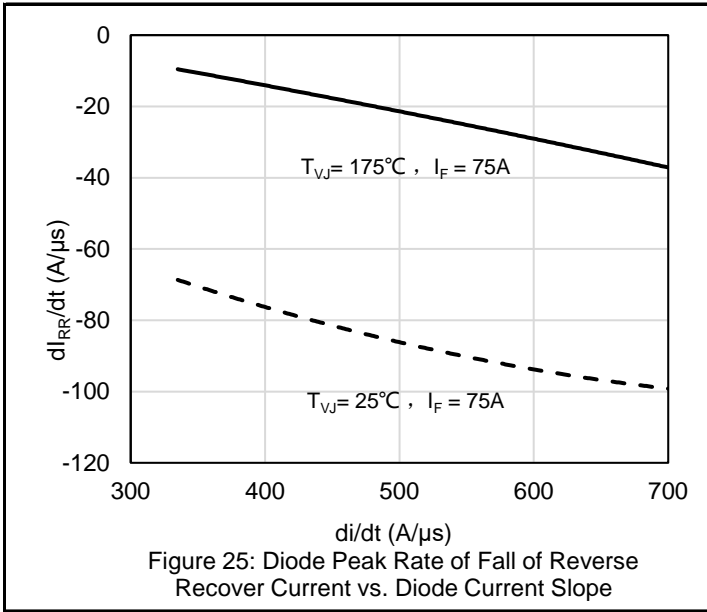


Test Circuit and Waveform


Switching Test Circuit & Waveforms

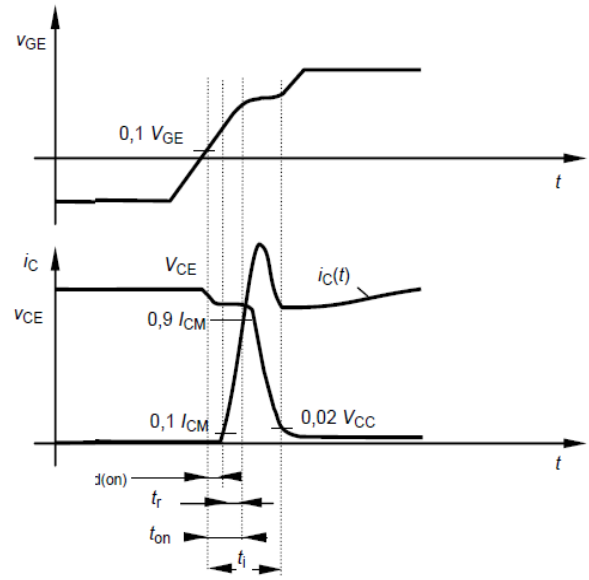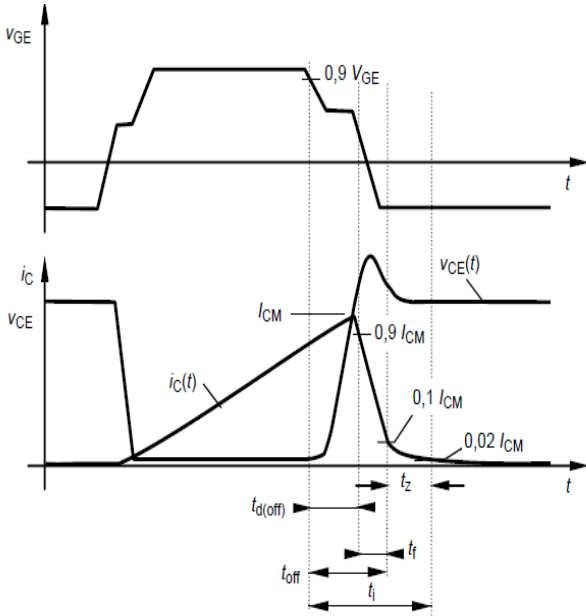

Diode Recovery Test Circuit & Waveforms

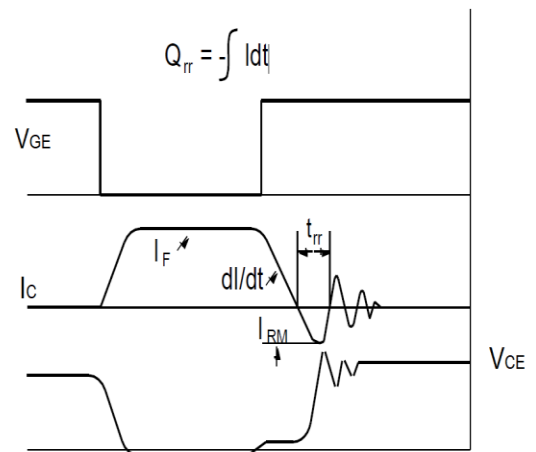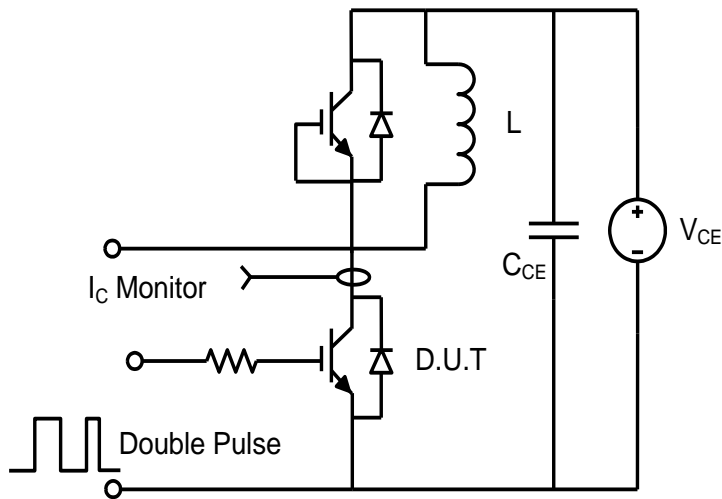

Package Outlines

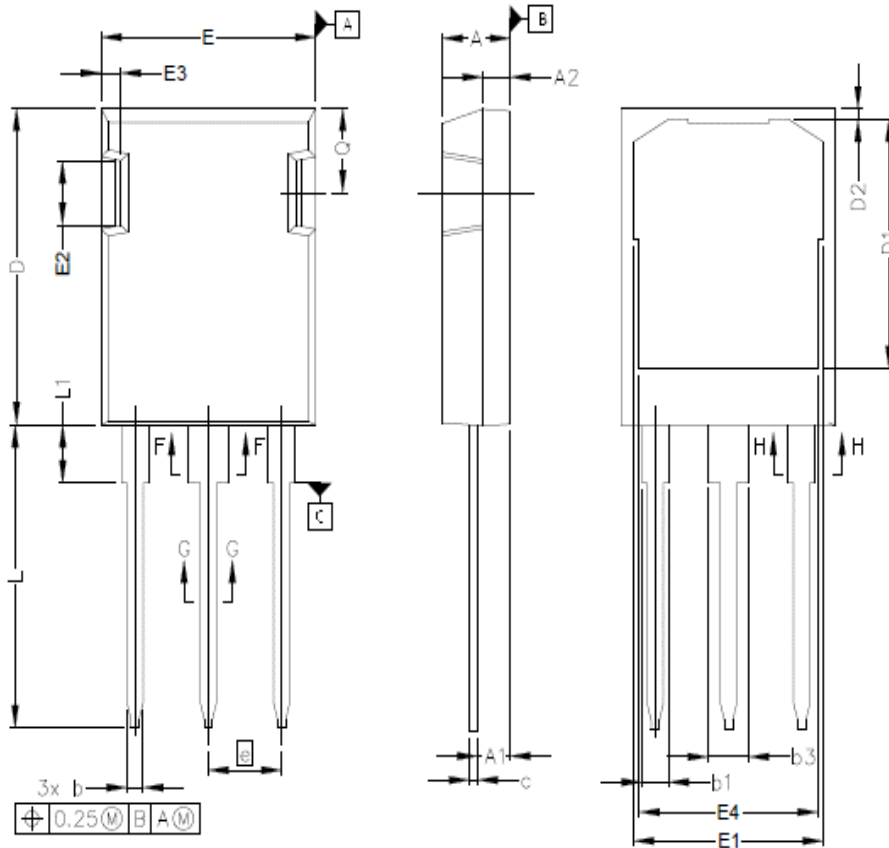

SYMBOL	MIN	MAX
A	4.83	5.21
A1	2.29	2.54
A2	1.91	2.16
b'	1.07	1.28
b	1.07	1.33
b1	1.91	2.41
b2	1.91	2.16
b3	2.87	3.38
b4	2.87	3.13
c'	0.55	0.65
c	0.55	0.68
D	20.80	21.10
D1	16.25	17.65
D2	0.50	0.80
E	15.75	16.13
E1	13.10	14.15
E2	3.68	5.10
E3	1.00	1.90
E4	12.38	13.43
e	5.44 BSC	
N	3	
L	19.81	20.32
L1	3.70	4.00
Q	5.49	6.00

Marking Information



Note:

BK2A075YHH = Product Name Code

XXXXXXX = Date code

Contact ALKAIDSEMI sales for detail information

Revision History

Revision	Release Date	Remark
Rev.1.3	2023/9/7	

Disclaimer

The information given in this document describes the independent performance of the product, but similar performance is not guaranteed under other working conditions, and cannot be guaranteed when installed with other products or equipment. To achieve the required performance of the product in actual scenarios, the customer should conduct a complete application test to assess the functionality of the product.

Alkaidsemi assumes no responsibility for equipment failures result from using products at values that exceed the ratings, operating conditions, or other parameters listed in the product specifications.

The product described in this specification is not applicable for aerospace or other applications which requires high reliability. Customers using or selling these products for use in medical, life-saving, or life-sustaining applications do so at their own risk and agree to fully indemnify.

Due to product or technical improvements, the information described or contained herein may be changed without prior notice.